Limelight 9480/9481

Cocoa 3061

Specifications

Contents
56% pre-consumer recycled polyester
44% post-consumer recycled polyester

Weight
12.2 ± 1.0 oz./lin .yd.

Width
54" min. useable

Repeat
4.125" vertical, 2.375" horizontal

Treatment
none

Backing
polyester backcoating

Backing
polyester backcoating

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners. Read the Cleaning & Disinfection Handbook.

Performance

Breaking Strength (ASTM D5034)
175 lbf min. warp and 125 lbf min. fill

Tear (ASTM D2261)
25 lbf min. warp and fill

Seam Slippage (ASTM D4034)
50 lbf min. warp and fill

Pilling resistance (ASTM D3511)
Class 4 min.

Colorfastness to light (AATCC 16.3 Option 3)
Grade 4 min. at 40 hours

Colorfastness to crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet

Wyzenbeek Abrasion resistance (ASTM D4157)
50,000 double rubs min. cotton duck

Flammability
CA Technical Bulletin 117-2013 Section 1

Miscellaneous

Every effort has been made to ensure color accuracy of the digital images, however, please order a sample before specification. Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Proudly woven in North America supporting our local communities.

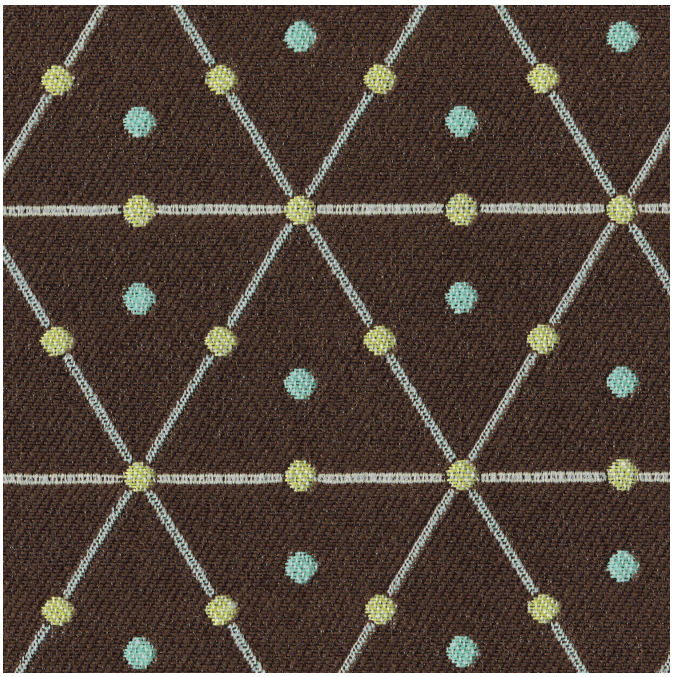

Terratex is a registered trademark of Duvaltex and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.

Guilford of Maine