


# Essence 4873

PANEL

PANEL

## Essence 4873

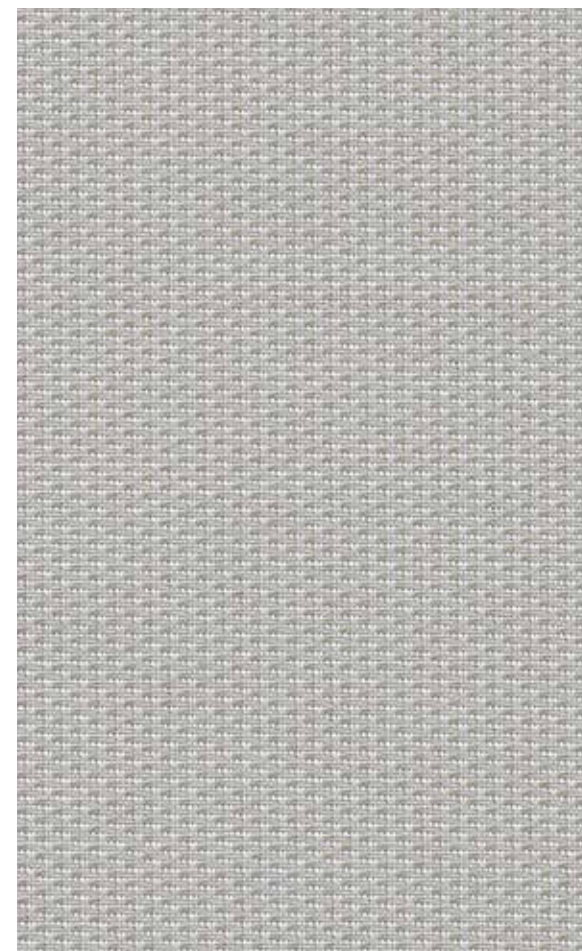

**Ash**  
2634




**Tobacco**  
2635




**Charcoal Melange**  
2637



**Cream**  
2631



**Tawny**  
2630




**Clementine**  
2638




**Boysenberry**  
2639



**Spanish Olive**  
2632



**Heather**  
2633



**Waters**  
2636

### Specifications

Content	100% polyester
Weight	11.8 ± 1.0 oz./lin. yd.
Width	66" min. useable
Repeat	.27" vertical   .18" horizontal

### Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

### Miscellaneous

Proudly woven in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Visit [guilfordofmaine.com](http://guilfordofmaine.com) for samples.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

\*Certification Marks owned by the Association for Contract Textiles, Inc.

### Performance

Colorfastness to Light (AATCC 16.3 Option 3)  
Grade 4 min. at 40 hours

Colorfastness to Crocking (AATCC 8)  
Grade 4 min. dry & Grade 3 min. wet

Breaking Strength (ASTM D5034)  
160 lbf warp and 105 lbf fill

Flammability (ASTM E84)  
Class I or A

### Sustainability

